



Austrian Institute of Construction Engineering  
Schenkenstrasse 4 | T+43 1 533 65 50  
1010 Vienna | Austria | F+43 1 533 64 23  
www.oib.or.at | mail@oib.or.at



## European Technical Assessment

**ETA-09/0036**  
of 21.04.2023

General part

**Technical Assessment Body issuing the European Technical Assessment**

Österreichisches Institut für Bautechnik (OIB)  
Austrian Institute of Construction Engineering

**Trade name of the construction product**

MM – crosslam

**Product family to which the construction product belongs**

Solid wood slab elements to be used as structural elements in buildings

**Manufacturer**

Mayr-Melnhof Holz Holding AG  
Turmgasse 67  
8700 Leoben  
Austria

**Manufacturing plant**

Mayr-Melnhof Holz Gaishorn GmbH  
Gaishorn 182  
8783 Gaishorn am See  
Austria

Mayr-Melnhof Holz Leoben GmbH  
Turmgasse 67  
8700 Leoben  
Austria

**This European Technical Assessment contains**

21 pages including 5 Annexes which form an integral part of this assessment.

**This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of**

European Assessment Document (EAD)  
130005-00-0304 “Solid wood slab element to be used as a structural element in buildings”.

**This European Technical Assessment replaces**

European Technical Assessment ETA-09/0036 of 02.09.2020.

## Remarks

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of Austrian Institute of Construction Engineering. Any partial reproduction has to be identified as such.

Specific parts

### 1 Technical description of the product

#### 1.1 General

This European Technical Assessment<sup>1</sup> (ETA) applies to the cross laminated timber “MM – crosslam”. MM – crosslam is made of softwood boards which are bonded together in order to form cross laminated timber (solid wood slab elements). Generally, adjacent layers of the softwood boards are arranged perpendicular (angle of 90°) to each other, see Annex 1, Figure 1.

The principle structure of the cross laminated timber is shown in Annex 1, Figure 2 and Figure 3. Surfaces are planed.

The solid wood slab elements consist of at least three and up to thirteen adjacent layers which are arranged perpendicular to each other. With regard to the thickness of the solid wood slab element, thickness and orientation of individual layers are symmetrically assembled. In case of serious deviations from symmetry potential effects should be investigated.

In multilayer elements with at least five layers, a maximum of two consecutive board layers may be arranged in the same direction if their all over thickness does not exceed 90 mm.

Single board layers (maximum 50 % of the cross section) may be replaced by one- and multilayer solid wood panels. The solid wood panels shall be suitable for structural use.

The surfaces of the solid wood slabs may be provided with wood based panels.

MM – crosslam and the boards for its manufacturing correspond to the specifications given in the Annexes 1 and 2. The material characteristics, dimensions and tolerances of MM – crosslam, not indicated in these Annexes, are given in the technical file<sup>2</sup> of the European Technical Assessment.

The application of wood preservatives and flame retardants is not subject of the European Technical Assessment.

#### 1.2 Components

##### 1.2.1 Boards

The specification of the boards is given in Annex 2, Table 2. Boards are visually or machine strength graded. Only technically dried wood shall be used.

Wood species is European spruce or equivalent softwood.

##### 1.2.2 Wood-based panels

Wood-based panels are in accordance with EN 13986 or a European Technical Assessment.

<sup>1</sup> The ETA-09/0036 was firstly issued in 2009 as European technical approval with validity from 23.03.2009, extended in 2013 with validity from 17.06.2013, amended and converted in 2015 to the European Technical Assessment ETA-09/0036 of 30.06.2015, amended in 2020 to the European Technical Assessment ETA-09/0036 of 15.01.2020, amended in 2020 to the European Technical Assessment ETA-09/0036 of 02.09.2020 and amended in 2023 to the European Technical Assessment ETA-09/0036 of 21.04.2023.

<sup>2</sup> The technical file of the European Technical Assessment is deposited at Österreichisches Institut für Bautechnik and, in so far as is relevant to the tasks of the notified product certification body involved in the assessment and verification of constancy of performance procedure, is handed over to the notified product certification body.

### 1.2.3 Adhesive

The adhesive for bonding of the cross laminated timber and the finger joints of the individual boards shall conform to EN 301 or EN 15425.

## 2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (thereafter EAD)

### 2.1 Intended use

The solid wood slab is intended to be used as a structural or non-structural element in buildings and timber structures.

The solid wood slab shall be subjected to static and quasi-static actions only.

The solid wood slab is intended to be used in service classes 1 and 2 according to EN 1995-1-1<sup>3</sup>. Members which are directly exposed to the weather shall be provided with an effective protection for the solid wood slab element in service.

### 2.2 General assumptions

The solid wood slab elements are manufactured in accordance with the provisions of the European Technical Assessment using the manufacturing process as identified in the inspection of the manufacturing plant by Österreichisches Institut für Bautechnik and laid down in the technical file.

The manufacturer shall ensure that the requirements in accordance with the Clauses 1, 2 and 3 as well as with the Annexes of the European Technical Assessment are made known to those who are concerned with design and execution of the works.

Layers of planed boards shall be bonded together to the required thickness of the cross laminated timber. The individual boards shall be jointed in longitudinal direction by means of finger joints according to EN 14080, there shall be no butt joints.

Adhesive shall be applied on one face of each board. The edges of the boards need not to be bonded.

#### Design

The European Technical Assessment only applies to the manufacture and use of cross laminated timber. Verification of stability of the works including application of loads on the cross laminated timber is not subject to the European Technical Assessment.

The following conditions shall be observed:

- Design of cross laminated timber members is carried out under the responsibility of an engineer experienced in such products.
- Design of the works shall account for the protection of the cross laminated timber.
- The cross laminated timber members are installed correctly.

Design of cross laminated timber members elements may be according to EN 1995-1-1 and EN 1995-1-2, taking into account of Annexes 2 and 3 of the European Technical Assessment.

Standards and regulations in force at the place of use shall be considered.

#### Packaging, transport, storage, maintenance, replacement and repair

Concerning product packaging, transport, storage, maintenance, replacement and repair it is the responsibility of the manufacturer to undertake the appropriate measures and to advise his clients on the transport, storage, maintenance, replacement and repair of the product as he considers necessary.

<sup>3</sup> Reference documents are listed in Annex 5.

### Installation

It is assumed that the product will be installed according to the manufacturer's instructions or (in absence of such instructions) according to the usual practice of the building professionals.

## 2.3 Assumed working life

The provisions made in the European Technical Assessment (ETA) are based on an assumed intended working life of MM – crosslam of 50 years, when installed in the works, provided that the cross laminated timber elements are subject to appropriate installation, use and maintenance (see Clause 2.2). These provisions are based upon the current state of the art and the available knowledge and experience<sup>4</sup>.

The indications given as to the working life of the construction product cannot be interpreted as a guarantee neither given by the product manufacturer or his representative nor by EOTA nor by the Technical Assessment Body, but are regarded only as a means for choosing the appropriate products in relation to the expected economically reasonable working life of the works.

## 3 Performance of the product and reference to the methods used for its assessment

### 3.1 Essential characteristics of the product

**Table 1: Essential characteristics of the product and assessment methods**

No	Essential characteristic	Product performance
Basic requirement for construction works 1: Mechanical resistance and stability <sup>1)</sup>		
1	Bending <sup>2)</sup>	Annex 2
2	Tension and compression <sup>2)</sup>	Annex 2
3	Shear <sup>2)</sup>	Annex 2
4	Embedment strength	Annex 2
5	Creep and duration of the load	Annex 2
6	Dimensional stability	Annex 2
7	In-service environment	Annex 2
8	Bond integrity	Annex 2
Basic requirement for construction works 2: Safety in case of fire		
9	Reaction to fire	Annex 2
10	Resistance to fire	Annex 2
Basic requirement for construction works 3: Hygiene, health and the environment		
11	Content, emission and/or release of dangerous substances	3.1.1
12	Water vapour permeability – Water vapour transmission	Annex 2
Basic requirement for construction works 4: Safety and accessibility in use		
13	Impact resistance	Annex 2

<sup>4</sup> The real working life of a product incorporated in a specific works depends on the environmental conditions to which that works is subject, as well as on the particular conditions of the design, execution, use and maintenance of that works. Therefore, it cannot be excluded that in certain cases the real working life of the product can also be shorter than the assumed working life.

No	Essential characteristic	Product performance
Basic requirement for construction works 5: Protection against noise		
14	Airborne sound insulation	No performance assessed.
15	Impact sound insulation	No performance assessed.
16	Sound absorption	No performance assessed.
Basic requirement for construction works 6: Energy economy and heat retention		
17	Thermal conductivity	Annex 2
18	Air permeability	No performance assessed.
19	Thermal inertia	Annex 2
<p><sup>1)</sup> These characteristics also relate to basic requirement for construction works 4.</p> <p><sup>2)</sup> Load bearing capacity and stiffness regarding mechanical actions perpendicular to and in plane of the solid wood slab element.</p>		

### 3.1.1 Hygiene, health and the environment

The release of dangerous substances is determined according to EAD 130005-00-0304, “Solid wood slab element to be used as a structural element in buildings”. No dangerous substances is the performance of the MM – crosslam in this respect.

NOTE In addition to the specific clauses relating to dangerous substances contained in the European Technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

## 3.2 Assessment methods

### 3.2.1 General

The assessment of the essential characteristics in Clause 3.1 of MM – crosslam for the intended use, and in relation to the requirements for mechanical resistance and stability, for safety in case of fire, for hygiene, health and the environment, for safety and accessibility in use, for protection against noise and for energy economy and heat retention in use in the sense of the basic requirements for construction works № 1 to 6 of Regulation (EU) № 305/2011 has been made in accordance with the European Assessment Document EAD 130005-00-0304, Solid wood slab element to be used as a structural element in buildings.

### 3.2.2 Identification

The European Technical Assessment for MM – crosslam is issued on the basis of agreed data that identify the assessed product. Changes to materials, to composition, to characteristics of the product, or to the production process could result in these deposited data being incorrect. Österreichisches Institut für Bautechnik should be notified before the changes are implemented, as an amendment of the European Technical Assessment is possibly necessary.

#### **4 Assessment and verification of constancy of performance (thereafter AVCP) system applied, with reference to its legal base**

##### **4.1 System of assessment and verification of constancy of performance**

According to Commission Decision 97/176/EC the system of assessment and verification of constancy of performance to be applied to MM – crosslam is System 1. System 1 is detailed in Commission Delegated Regulation (EU) № 568/2014 of 18 February 2014, Annex, 1.2., and provides for the following items

- (a) The manufacturer shall carry out
  - (i) factory production control;
  - (ii) further testing of samples taken at the manufacturing plant by the manufacturer in accordance with a prescribed test plan<sup>5</sup>;
- (b) The notified product certification body shall decide on the issuing, restriction, suspension or withdrawal of the certificate of constancy of performance of the construction product on the basis of the outcome of the following assessments and verifications carried out by that body:
  - (i) an assessment of the performance of the construction product carried out on the basis of testing (including sampling), calculation, tabulated values or descriptive documentation of the product;
  - (ii) initial inspection of the manufacturing plant and of factory production control;
  - (iii) continuous surveillance, assessment and evaluation of factory production control.

##### **4.2 AVCP for construction products for which a European Technical Assessment has been issued**

Notified bodies undertaking tasks under System 1 shall consider the European Technical Assessment issued for the construction product in question as the assessment of the performance of that product. Notified bodies shall therefore not undertake the tasks referred to in point 4.1 (b)(i).

#### **5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

##### **5.1 Tasks for the manufacturer**

###### **5.1.1 Factory production control**

In the manufacturing plant the manufacturer shall establish and continuously maintain a factory production control. All procedures and specification adopted by the manufacturer shall be documented in a systematic manner. The factory production control shall ensure the constancy of performances of MM – crosslam with regard to the essential characteristics.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the control plan. The incoming raw materials shall be subject to controls by the manufacturer before acceptance. Check of incoming materials shall include control of inspection documents presented by the manufacturer of the raw materials.

The frequencies of controls conducted during manufacturing and on the assembled product are defined by taking account of the manufacturing process of the product and are laid down in the control plan.

<sup>5</sup> The prescribed test plan has been deposited with Österreichisches Institut für Bautechnik and is handed over only to the notified product certification body involved in the procedure for the assessment and verification of constancy of performance. The prescribed test plan is also referred to as control plan.



The results of factory production control are recorded and evaluated. The records include at least the following data:

- Designation of the product, basic materials and components
- Type of control or test
- Date of manufacture of the product and date of testing of the product or basic materials or components
- Results of controls and tests and, if appropriate, comparison with requirements
- Name and signature of person responsible for factory production control

The records shall be kept at least for ten years time after the construction product has been placed on the market and shall be presented to the notified product certification body involved in continuous surveillance. On request they shall be presented to Österreichisches Institut für Bautechnik.

#### 5.1.2 Declaration of performance

The manufacturer is responsible for preparing the declaration of performance. When all the criteria of the assessment and verification of constancy of performance are met, including the certificate of conformity issued by the notified product certification body, the manufacturer shall draw up a declaration of performance.

### 5.2 Tasks for the notified product certification body

#### 5.2.1 Initial inspection of the manufacturing plant and of factory production control

The notified product certification body shall verify the ability of the manufacturer for a continuous and orderly manufacturing of MM – crosslam according to the European Technical Assessment. In particular the following items shall be appropriately considered

- Personnel and equipment
- The suitability of the factory production control established by the manufacturer
- Full implementation of the control plan

#### 5.2.2 Continuous surveillance, assessment and evaluation of factory production control

The notified product certification body shall visit the factory at least once a year for routine inspection. In particular the following items shall be appropriately considered

- The manufacturing process including personnel and equipment
- The factory production control
- The implementation of the control plan

The results of continuous surveillance are made available on demand by the notified product certification body to Österreichisches Institut für Bautechnik. When the provisions of the European Technical Assessment and the control plan are no longer fulfilled, the certificate of constancy of performance is withdrawn by the notified product certification body.

Issued in Vienna on 21.04.2023  
by Österreichisches Institut für Bautechnik

The original document is signed by:

Rainer Mikulits  
Managing Director







**Table 3: Product characteristics of the solid wood slab**

BWR	Essential characteristic	Assessment method	Level / Class / Description
1	<b>Mechanical resistance and stability</b>		
	<b>1. Mechanical actions perpendicular to cross laminated timber</b>		
	Strength class of boards	EN 338	C16 / T11 to C35 / T21
	Modulus of elasticity		
	– parallel to the grain of the boards $E_{0, mean}$	$I_{eff}$ , Annex 3 EAD 130005-00-0304, 2.2.1.1	C16 / T11 8 000 MPa C18 / T11 9 000 MPa C24 / T14 12 000 MPa C30 / T18 12 600 MPa C35 / T21 13 700 MPa
	– perpendicular to the grain of the boards $E_{90, mean}$	EN 338	C16 / T11 270 MPa C18 / T11 300 MPa C24 / T14 370 MPa C30 / T18 400 MPa C35 / T21 430 MPa
	Shear modulus		
	– parallel to the grain of the boards $G_{090, mean}$	EN 338	C16 / T11 500 MPa C18 / T11 560 MPa C24 / T14 690 MPa C30 / T18 750 MPa C35 / T21 810 MPa
– perpendicular to the grain of the boards (rolling shear modulus) $G_{9090, mean}$	EAD 130005-00-0304, 2.2.1.1 and 2.2.1.3	50 MPa	
Bending strength			
– parallel to the grain of the boards $f_{m, k}$	$W_{eff}$ , Annex 3 EAD 130005-00-0304, 2.2.1.1	C16 / T11 $1/k_{sys} \cdot 17.6 \text{ MPa}^{5)}$ C18 / T11 $1/k_{sys} \cdot 19.8 \text{ MPa}^{5)}$ C24 / T14 $1/k_{sys} \cdot 26.4 \text{ MPa}^{5)}$ C30 / T18 $1/k_{sys} \cdot 33.0 \text{ MPa}^{5)}$ C35 / T21 $1/k_{sys} \cdot 38.5 \text{ MPa}^{5)}$	
Tensile strength			
– perpendicular to the grain of the boards $f_{t, 90, k}$	EN 338, reduced	0.12 MPa	

<sup>5)</sup>  $k_{sys} = \max\{1.0; 1.1 - 0.025 \cdot n\}$

$n$  ... number of boards within cover layer

**MM – crosslam**

Annex 2

Characteristic data of cross laminated timber

of European Technical Assessment  
ETA-09/0036 of 21.04.2023





BWR	Essential characteristic	Assessment method	Level / Class / Description	
	<b>3. Other mechanical actions</b>			
	Creep and duration of load	$k_{mod}$ and $k_{def}$ according to EN 1995-1-1 for glued laminated timber		
	Dimensional stability Moisture content during service shall not change to such an extent that adverse deformation will occur.			
	Embedment strength	Embedment strength of fasteners may be calculated according to EN 1995-1-1. The direction of grain of the cover layer shall be taken as reference.		
	In-service environment			
	Durability of timber	EN 1995-1-1		
	Service classes		1 and 2	
	Bond integrity	EAD 130005-00-0304	Pass	
<b>2</b>	<b>Safety in case of fire</b>			
	<u>Reaction to fire</u>			
	Glued laminated timber products	Commission Decision 2005/610/EC	Mean density of wood $\geq 380 \text{ kg/m}^3$ Euroclass D-s2, d0	
	<u>Resistance to fire</u>			
	Structures with specified fire resistance	EN 13501-2	Annex 3	
	Charring rate for MUF - Charring of the cover layer - Charring of more layers than the cover layer	EAD 130005-00-0304	Floor/Roof 0.65 mm/min 0.76 mm/min <sup>6)</sup>	Wall 0.60 mm/min 0.71 mm/min
	Charring rate for PU - Charring of the cover layer - Charring of more layers than the cover layer	EAD 130005-00-0304	Floor/Roof 0.65 mm/min 1.3 mm/min <sup>6)</sup>	Wall 0.63 mm/min 0.86 mm/min
<b>MM – crosslam</b>		Annex 2		
Characteristic data of cross laminated timber		of European Technical Assessment ETA-09/0036 of 21.04.2023		

<sup>6)</sup> until 25 mm of charring. Afterwards the charring rate 0.65 mm/min applies up to the next glue line.

electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy

BWR	Essential characteristic	Assessment method	Level / Class / Description
3	<b>Hygiene, health and environment</b>		
	Vapour permeability, $\mu$ , for wood	EN ISO 10456	50 (dry) to 20 (wet)
4	<b>Safety and accessibility in use</b>		
	Impact resistance	Soft body resistance is assumed to be fulfilled for walls with a minimum of 3 layers and minimum thickness of 60 mm.	
6	<b>Energy economy and heat retention</b>		
	Thermal conductivity, $\lambda$ , of wood	EN ISO 10456	0.12 W/(m·K)
	Thermal inertia, specific heat capacity $c_p$ , of wood	EN ISO 10456	1 600 J/(kg·K)
<b>MM – crosslam</b>		Annex 2	
Characteristic data of cross laminated timber		of European Technical Assessment ETA-09/0036 of 21.04.2023	





Cladding on the fire exposed side	Mounting	CLT element	Test load	Tested wall height	Classification
		Designation and structure [mm]	[kN/m]	[m]	i => o
12.5 mm gypsum plasterboard type DF according to EN 520, $\rho \geq 800 \text{ kg/m}^3$ 40 mm mineral wool according to EN 13162, $\rho = 11 \text{ kg/m}^3$	Drywall screws 3.9 mm x 35 mm with a = 75/150 mm (edge/centre) row distance 625 mm	MM-crosslam 100 3s 40-20-40	35	3	REI 120
<b>Floor structures</b>					
Cladding on the fire exposed side	Mounting	CLT element	Test load	Tested span	Classification
		Designation and structure [mm]	[kN/m <sup>2</sup> ]	[m]	b => a
–	–	MM-crosslam 140 5s 40-20-20-20-40	5	5	REI 60
12.5 mm gypsum plasterboard type DF according to EN 520, $\rho \geq 800 \text{ kg/m}^3$	Drywall screws 3.9 mm x 35 mm with a = 75/150 mm (edge/centre) row distance 625 mm	MM-crosslam 100 3s 40-20-40	0.6	5	REI 60
Cladding on the fire exposed side	Mounting	CLT element	Test load	Tested span	Classification
		Designation and structure [mm]	[kN/m <sup>2</sup> ]	[m]	b => a
–	–	MM-crosslam 160 5s 40-20-40-20-40	6	5	REI 90
12.5 mm gypsum plasterboard type DF according to EN 520, $\rho \geq 800 \text{ kg/m}^3$	Drywall screws 3.9 mm x 35 mm with a = 75/150 mm (edge/centre) row distance 625 mm	MM-crosslam 140 5s 40-20-20-20-40	–	5	EI 90
35 mm wood wool board Heraklith EPV type L2-W1-T2-S2-P2-CS(10/Y)200-CI3 according to EN 13168	Heraklith screws 4.5 mm x 60 mm with a = 215 mm row distance 625 mm	MM-crosslam 160 5s 40-20-40-20-40	–	5	EI 90
<b>MM – crosslam</b>		Annex 3 of European Technical Assessment ETA-09/0036 of 21.04.2023			
Resistance to fire					





electronic copy

**Mechanical actions perpendicular to plane and in plane of cross laminated timber**

General

Due to the perpendicular orientation of the boards, cross laminated timber is able to transfer loads in all directions according to its condition of support.

For calculation of characteristic values of cross-section, only boards which are oriented in direction of the mechanical action may be employed.

For design of cross laminated timber according to EN 1995-1-1, characteristic strength and stiffness of solid wood according to Annex 2 shall be taken. If the cross laminated timber is comprised of visually graded boards, the characteristic bending strength parallel to the grain may be determined with the following equation:

$$f_{m, CLT, k} = \text{Minimum} \begin{cases} a_{CLT} \cdot f_{t, 0, k}^{0,8} \\ 1,2 \cdot f_{m, k} \end{cases}$$


$$b \geq 1 \text{ m}$$

Where

- $f_{m, CLT, k}$  ..... MPa ..... characteristic bending strength of cross laminated timber
- $f_{m, k}$  ..... MPa ..... characteristic bending strength according to EN 338
- $a_{CLT} = 3.5$  ..... - ..... for visually graded timber
- $f_{t, 0, k}$  ..... MPa ..... characteristic tensile strength of board according to EN 338
- $b$  ..... mm ..... width of the member of cross laminated timber

For cross laminated timber multi-axle stressed in both principal directions, different stiffness for the two principal directions shall be considered.

Mechanical actions perpendicular to cross laminated timber

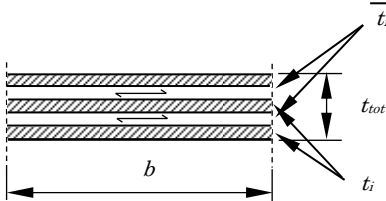

Where

- $t_i$  ..... Thickness of board layers in direction of mechanical actions
- $\bar{t}_i$  ..... Thickness of board layers perpendicular to direction of mechanical actions

The bending stiffness is specified in relation to the effective moment of inertia  $I_{eff}$ . The calculation of the effective moment of inertia and therewith of the effective bending stiffness is according to EN 1995-1-1.

<b>MM – crosslam</b>	Annex 4  of European Technical Assessment ETA-09/0036 of 21.04.2023
Design considerations for cross laminated timber	

electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy electronic copy

For  $I_{eff}$  see clause 9.1.3 and Annex B of EN 1995-1-1.

The term  $\frac{S_i}{K_i}$  of EN 1995-1-1 should be substituted by  $\frac{\bar{t}_i}{G_{9090} \cdot b}$ .

$$I_i = \frac{b \cdot t_i^3}{12}$$

$$W_{eff} = \frac{2 \cdot I_{eff}}{t_{tot}}$$

$$A_i = b \cdot t_i$$

$$h_{tot} = \sum_i (t_i + \bar{t}_i)$$


$$\tau_{v,d} = \frac{1,5 \cdot V_d}{A_{gross}}$$

$$A_{gross} = b \cdot t_{tot}$$

Where

- $I$ ..... moment of inertia
- $I_{eff}$ ..... effective moment of inertia
- $S$ ..... spacing of fasteners according to EN 1995-1-1 (*not relevant for solid wood slab*)
- $K$ ..... slip modulus according to EN 1995-1-1 (*not relevant for solid wood slab*)
- $G_{9090}$  ..... shear modulus of the board perpendicular to grain (*rolling shear modulus*);  
 $G_{9090} = 50 \text{ MPa}$
- $b$ ..... width of the member of cross laminated timber

**Mechanical actions in plane of the solid wood slab**

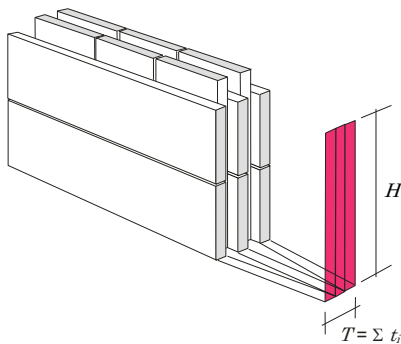

Where

- $H \leq 400 \text{ mm}$
- $t_i$ ..... Thickness of board layers in direction of mechanical actions
- $\bar{t}_i$ ..... Thickness of board layers perpendicular to direction of mechanical actions
- $V$ ..... Shear force

Under the terms of the technical beam theory the following equations may be used.

Moment of inertia

$$I_{net} = \frac{T \cdot H^3}{12}$$

Section modulus

$$W_{net} = \frac{T \cdot H^2}{6}$$

Shear strength

$$\tau_{v,d} = \text{Maximum} \left\{ \begin{array}{l} \frac{3}{2} \cdot \frac{V_d}{A_{x,net}} \\ \frac{3}{2} \cdot \frac{V_d}{A_{z,net}} \end{array} \right.$$

$$A_{x,net} = H \cdot \sum_i \bar{t}_i$$

$$A_{z,net} = H \cdot \sum_i t_i$$

<b>MM – crosslam</b>	Annex 4
Design considerations for cross laminated timber	of European Technical Assessment ETA-09/0036 of 21.04.2023



EAD 130005-00-0304, European Assessment Document for “Solid wood slab element to be used as a structural element in buildings”

EN 301 (11.2017), Adhesives, phenolic and aminoplastic, for load-bearing timber structures – Classification and performance requirements

EN 338 (04.2016), Structural timber – Strength classes

EN 520:2004+A1 (08.2009), Gypsum plasterboards – Definitions, requirements and test methods

EN 1995-1-1 (11.2004), +AC (06.2006), +A1 (06.2008), +A2 (05.2014), Eurocode 5 – Design of timber structures - Part 1-1: General – Common rules and rules for buildings

EN 1995-1-2 (11.2004) +AC (06.2006), +AC (03.2009), Eurocode 5 – Design of timber structures – Part 1-2: General – Structural fire design

EN 13162:2012+A1 (02.2015), Thermal insulation products for buildings – Factory made mineral wool (MW) products – Specification

EN 13168:2012+A1 (02.2015), Thermal insulation products for buildings – Factory made wood wool (WW) products – Specification

EN 13183-2 (04.2002), Moisture content of a piece of sawn timber – Part 2: Estimation by electrical resistance method

EN 13986:2004+A1 (04.2015), Wood-based panels for use in construction – Characteristics, evaluation of conformity and marking

EN 14080 (06.2013), Timber structures – Glued laminated timber and glued solid timber – Requirements

EN 15425 (01.2017), Adhesives – One component polyurethane for load bearing timber structures – Classification and performance requirements

EN ISO 10456 (12.2007), +AC (12.2009), Building materials and products – Hygrothermal properties – Tabulated design values and procedures for determining declared and design thermal values

<b>MM – crosslam</b>	Annex 5  of European Technical Assessment ETA-09/0036 of 21.04.2023
Reference documents	